

BA31S-3

Backbar Cooler


Product Features

- EU Energy Class B
- Approx. 59% more energy efficient than previous BA-range
- Double glazed tempered glass
- Energy saving variable speed compressor
- Self-closing sliding glass doors
- Ventilated cooling for fast pull-down and even temperature
- Easy access electronic thermostat
- Adjustable shelves behind each door
- LED interior light
- Lock

High-quality backbar with low energy consumption

The BA is our range of high-quality backbars. It has been updated and now uses in average 59% less energy compared to the previous models from the same range. This backbar has ventilated cooling for a short pull-down time to ensure that you can keep up with customer demand for cold beverages. If you need to adjust the temperature this is easily done on the electronic thermostat. The backbar cooler is made of solid materials and has adjustable chrome shelves with closely-spaced wires, which gives you a high capacity and stability. Furthermore, it has self-closing aluminium sliding doors with double glazed tempered glass. This helps save energy, but it also means a great product visibility. The BA range is also available in a variant with hinged doors.

Measures and Content		
Total Display Area	m ²	0.84
Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	101 / 94
Gross / Net Volume	l	311 / 288
Design and Material		
Door No & Type	3 sliding glass doors	
Door Reversible		No
Tempered glass		Yes
Shelves No & Type	6 wire shelves chrome	
Shelf Color	Chrome	
Shelf Dimensions	400x318 / 432x318 mm	
Feet / Legs	4 adjustable feet	
Exterior Finish	Black	
Interior Finish	Stucco aluminium	
Interior Light	LED	
Lock		Yes
Cooling and Functions		
Type of Controller	Electronic	
Type of Cooling	Ventilated	
Type of Defrost	Automatic	
Refrigerant	R290	
Refrigerant Charge	g	90
Thermometer		Yes
Power and Consumption		
Energy Class	B	
Max Ambient	30°C at 55% RH	
Energy Consumption	kWh/24h	1.74
Annual Energy Cons.	kWh/year	635
Power	13 Amp	
Input Power	W	125
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	44
Dimensions		
Internal Dimension (WxDxH)	mm	1265 x 418 x 734
External Dimension (WxDxH)	mm	1350 x 515 x 900
Packed Dimension (WxDxH)	mm	1435 x 575 x 970
40ft Container Load	pcs	64

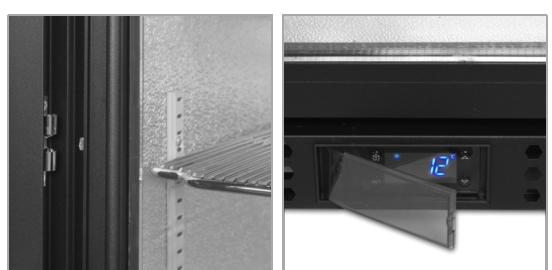

Door holder for loading of the cabinet

Electronic thermostat