



## OG8110/OP/P - Lincat Opus 800 Propane Gas Free-standing Single Tank Fryer with Pumped Filtration - 1 Basket - W 300 mm - 16.0 kW

An accurate Opus 800 Single-Tank Free Standing Gas Fryer which comes with a pumped oil filtration system.

- ✓ Accurate thermostatic control up to 190°C for consistent results and safe operation
- ✓ Oil can be filtered during or after service even whilst hot
- ✓ Convenient piezo ignition
- ✓ Externally fired heating gives easy access for cleaning tanks
- ✓ Pumped oil return enables the oil to be filtered and the fryer ready for use again in less than five minutes - safe and convenient

### Specifications

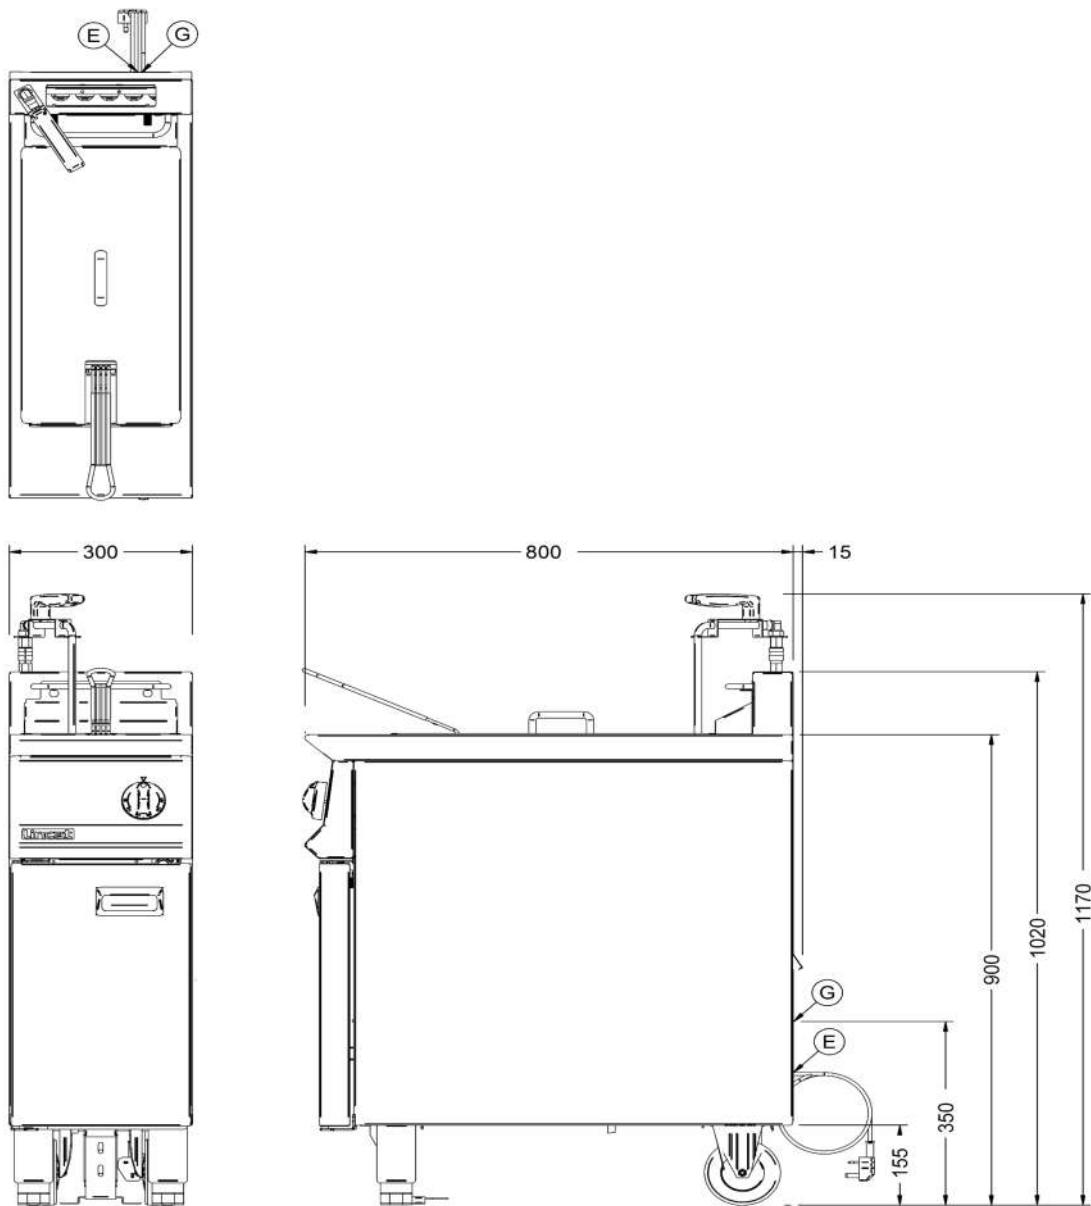
Summary		Power and Performance	
<b>Brand</b>	Lincat	<b>BTU per Hour</b>	54,592
<b>Range</b>	Opus 800	<b>Total Power kW</b>	16.0
<b>Power Type</b>	Gas	<b>Temperature Range °C</b>	90-190
<b>Gas Type</b>	Propane Gas	<b>IP Rating</b>	IP24
<b>Unit Type</b>	Free-standing	<b>Temperature Control</b>	Mechanical
<b>Available in UK Only</b>	No		
<b>UK Warranty</b>	2 Years Parts and Labour Warranty		
<b>Export Warranty</b>	Contact your local dealer		
<b>GTIN</b>	5056105103110		
Key Specifications		Capacity	
<b>Number of Baskets</b>	1	<b>Product Output per Hour</b>	22kg chips - 12mm [frozen], 32kg chips - 12mm [chi]
<b>Number of Tanks</b>	1	<b>Capacity Litres</b>	14.0
<b>Gravity Filtration</b>	No		
<b>Pumped Filtration</b>	Yes		
<b>Drain Location</b>	Through the body		
Weights and Dimensions		Supply Connections	
<b>Unit Height (External) mm</b>	1070	<b>Requires Installation</b>	Yes
<b>Unit Width (External) mm</b>	300	<b>Requires Electrical Supply</b>	Yes
<b>Unit Depth (External) mm</b>	815	<b>UK 3 Pin Plug</b>	Yes
<b>Net Weight Kg</b>	84	<b>Requires Hardwiring</b>	No
		<b>Electrical Supply Rating Watts</b>	100
		<b>Single Phase Amps</b>	0.5
		<b>Single Phase Voltage</b>	230
		<b>Gas Connection BSP</b>	1/2"
		<b>Gas Consumption at full rate Propane m³ per Hour</b>	1.14
		<b>Gas Pressure Propane mbar</b>	37.0
		<b>Total heat input at full rate Propane kW</b>	16.0
		<b>Total heat input at full rate Propane BTU per hour</b>	54,594

**Shipping**

<b>Packed Weight Kg</b>	92.4
<b>Packed Height cm</b>	122
<b>Packed Width cm</b>	85
<b>Packed Depth cm</b>	45

**Available Accessories**

<b>CH01</b>	Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU
<b>CH02</b>	Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU
<b>LK02</b>	OPUS 350 LEG KIT
<b>OA8955</b>	SPLASHGUARD FRYERS - OPUS 800

**Technical Picture**

**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of

**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 875536  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm