

Model:
XMD1200-P-NB-W

Panoramic open fronted multideck
5 x 1218mm shelves, undershelf LED lighting



F

General Information

Prodis XMD1200-P-NB-W panoramic open fronted multideck finished in RAL9003 Signal White.




Key Features

- -1°C to +7°C (M2) temp. range
- Forced air refrigeration
- 5 x 365mm deep adjustable height and angle shelves
- 380mm base shelf
- 1218mm shelf width
- (5) shelf edge ticket strips
- Undershelf LED lighting
- 540 litre (net) volume
- 2.32m² display area
- Slow rise nightblind
- HMI digital temperature controller
- R290 refrigerant
- 13amp plug in cabinet

Construction

- Painted steel construction
- RAL9003 Signal White interior and exterior
- 30mm panoramic Low E glazed end panel
- Steel front grill secured with neodymium magnets

Energy Label

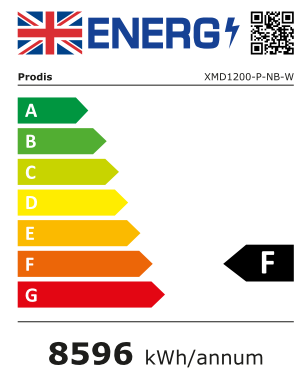

2.32 m² 7°C -1°C

Technical Data	
Model	XMD1200-P-NB-W
Color	Signal White RAL9003
End panel	Panoramic Low E glass 30mm
Night blind	Slow rise
Cabinet construction	Painted steel
Cabinet dimensions	1280 x 740 x 2000 (w,d,h mm)
End panel dimensions	30 x 740 x 2000 (w,d,h mm)
Shelf dimensions	1218 x 365mm
Base dimensions	1218 x 380mm
Number of shelves	5 + base
Shelf angle adjustment	0° / 7° / 14°
Shelf edge ticket strips	5 + base
Lighting	Undershelf LED (5) + top LED
Glass	Double glazed Low E
Controller	Digital with light switch
Packaged dimensions	1353 x 780 x 2100 (w,d,h mm)
Net weight	275kg
Gross weight	290kg
Net volume	540 litres
Total display area	2.32m ²
System type	Plug-in
Temperature range	-1°C to +7°C M2
Climate class	3 (25°C; 60%RH)
Refrigerant	R290
Refrigerant charge	2 x 135 gram
Compressors	2
Evaporator fans	1
Consender fans	2
Noise level	≤65 dB
Energy consumption	23.43 kWh / 24h
Rated power	1390 W
Voltage	220V / 50Hz
Fuse requirements	13amp



Approvals	Available At	Document #
UKCA CE 		